


## PVT SW HDMI D • Installation Guide

**IMPORTANT:**  
Go to [www.extron.com](http://www.extron.com) for the complete system installation guide, instructions, and specifications.




The Extron® PVT SW HDMI D is a 2-gang AV wallplate for PoleVault™, PlenumVault™ and WallVault™ Systems that support the PVS 405D switcher. It passes HDMI/DVI video with analog stereo audio signals to the PoleVault digital switcher up to 150 feet away over shielded twisted pair (STP) cable. The PVT has two HDMI connectors, two audio input jacks, and one IR connector (on the left front panel).

### Installation

#### NOTES:

- Install the wallplate directly into the wall using the supplied mud ring or a UL Listed 2-gang junction box (not supplied) such as a RACO 232, following the steps below.
- If installing a junction box, allow enough depth for the wallplate and cables. Take into consideration the bend radius of the cable. Do not bend the cables at 90 degrees.
- Conduit and conduit adapters should be used.

1. Using the mud ring or a junction box as a guide, mark the edges and cut out the material within the marked area of the mounting location.
2. Either:
  - Insert the mud ring into the opening, rotate the locking arms, and secure with the supplied screws,
  - or
  - Insert the wall box and secure with nails or screws.
3. Run the STP cable from the PoleVault switcher location, going behind the wall and to the PVT location, then thread the cables through the mud ring or wall box.

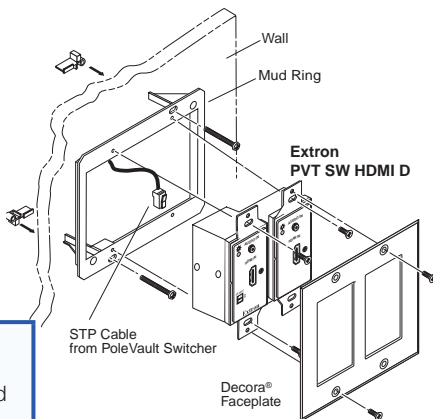

#### NOTES:

- Extron highly recommends shielded twisted pair (STP) cabling with shielded RJ-45 plugs.
- The STP cables supplied are terminated to TIA 568A standard.

4. Plug the STP cable from the PoleVault switcher into the RJ-45 connector labeled PVT Out on the rear of the wallplate.



	568A	568B
Pin	Wire Color	Wire Color
1	White-green	White-orange
2	Green	Orange
3	White-orange	White-green
4	Blue	Blue
5	White-blue	White-blue
6	Orange	Green
7	White-brown	White-brown
8	Brown	Brown

# PVT SW HDMI D • Installation Guide (Continued)

- 5. Mount the cabled device into the mud ring or wall box and attach the supplied Decora® faceplate.
- 6. Connect HDMI sources to the two front panel HDMI input connector.
- 7. Connect audio sources to the audio input jacks.
- 8. Connect the IR emitter to the front panel 2-pole captive screw connector with the signal wire in the hole marked “S” and the ground wire in the hole marked “G.”  
Place the IR emitter near or in front of the IR pickup sensor on the source device.

**NOTE:** To complete system installation, see the *Digital PoleVault System Installation Guide (featuring the PVS 405D switcher)*, available online at [www.extron.com](http://www.extron.com).

<b>Extron USA Headquarters</b> +1.800.633.9876 (Inside USA/Canada Only)		<b>Extron Europe</b> +800.3987.6673 (Inside Europe Only) +31.33.453.4040 +31.33.453.4050 FAX	<b>Extron India</b> 1800.3070.3777 (Inside India Only) +91.80.3055.3777 +91.80.3055.3737 FAX
<b>Extron USA - West</b> +1.714.491.1500 +1.714.491.1517 FAX	<b>Extron USA - East</b> +1.919.850.1000 +1.919.850.1001 FAX	<b>Extron Japan</b> +81.3.3511.7655 +81.3.3511.7656 FAX	<b>Extron China</b> +86.21.3760.1568 +86.21.3760.1566 FAX
<b>Extron Asia</b> +65.6383.4400 +65.6383.4664 FAX	<b>Extron Middle East</b> +971.4.299.1800 +971.4.299.1880 FAX	<b>Extron Korea</b> +82.2.3444.1571 +82.2.3444.1575 FAX	68-2382-01 Rev A 10 13